


ODISSEY




ODISSEY


ODISSEY

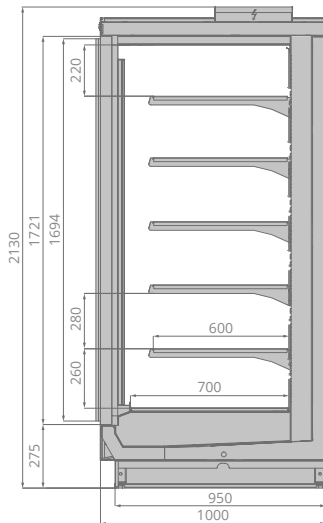



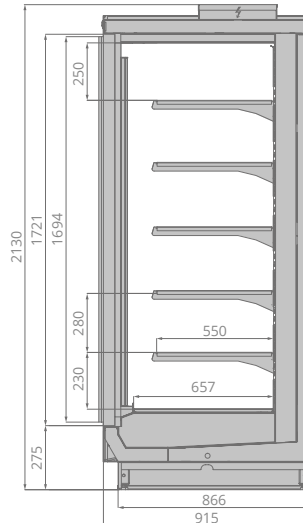



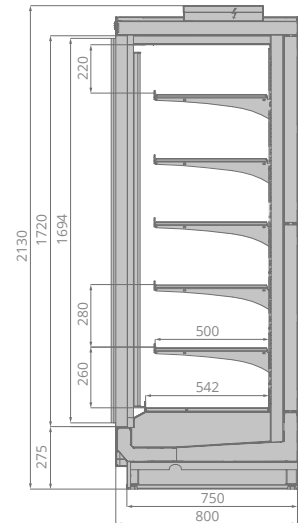

ODISSEY COMPACT



ODISSEY SLIM



	± C°	 mm	 mm	 mm	 mm	 m ²	 m ³	 mm	 kW	kW/24h
Odissey 125	-22...-18	1250	2130	1000	1330	4,4	1,22	600	0,7	11
Odissey 200	-22...-18	1875	2130	1000	1955	6,6	1,8	600	1,1	18
Odissey 250	-22...-18	2500	2130	1000	2580	8,8	2,45	600	1,4	22
Odissey 375	-22...-18	3750	2130	1000	3830	13,2	3,67	600	2,1	38
Odissey Compact 125	-22...-18	1250	2130	915	1350	3,75	1,02	550	0,6	11
Odissey Compact 200	-22...-18	1880	2130	915	1980	5,6	1,5	550	0,9	18
Odissey Compact 250	-22...-18	2500	2130	915	2600	7,5	2,04	550	1,3	22
Odissey Compact 375	-22...-18	3750	2130	915	3850	11,2	3,06	550	1,9	38
Odissey Slim 125	-22...-18	1250	2130	800	1350	3,68	1,02	500	0,6	11
Odissey Slim 200	-22...-18	1880	2130	800	1980	5,5	1,5	500	0,9	18
Odissey Slim 250	-22...-18	2500	2130	800	2600	7,353	2,04	500	1,1	22
Odissey Slim 375	-22...-18	3750	2130	800	3850	11	3,06	500	1,6	38

Компания Brandford™ оставляет за собой право вносить изменения в технические характеристики и дизайн продукции без предварительного уведомления.